



Angle Grinder

Satisfy Professional's Needs

GA7030/ S, GA7040/ S 180mm (7")

GA9030/ S, GA9040/ S 230mm (9")

Outstanding Durability




The Inside of the Creat

Outstanding Durability


/// Superior Anti-Dust Structure

Protective zigzag varnish on armature coil.
Protective powder varnish-coating on field coil.
Bearing-protective labyrinth construction.
Vent slots designed to minimize dust entrance.



/// Machined Bevel Gear

having durability higher than sintered gear.

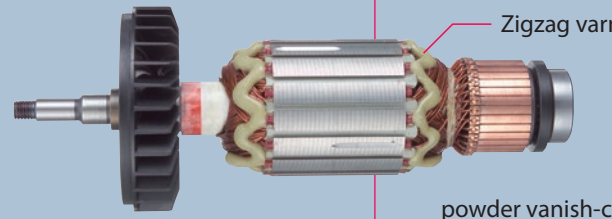

Zigzag varn

powder varnish-co

/// Large Rubber Tool Rest


/// Increased Heat Resistance

superior to our predecessor models.

/// Torque Limiter

/// Large-bond

having durab



/// Heavy Duty Motor


180mm (7") GA7030/ S **2,400W** GA7040/ S **2,600W**

230mm (9") GA9030/ S **2,400W** GA9040/ S **2,600W**

ure Is...

ish

coating




/// Rotatable Rear Handle

Can be positioned to suit most cutting and grinding operations. (90 degrees R/L)



ed shaft
ility



/// Low Vibration Rear Handle

with soft grip for more comfort and control.



///Vibration Absorbing Side Grip (option)





Option

Anti Vibration AVT Grip

Part No. 194290-6



Loop Handle

Part No. 192619-0

Plastic carrying case



Part No. 824755-1

Dust Collecting Wheel Guard

Part No. 194044-1



Dust Covers

Part No. 194289-1

Protect motor from metal dust.



Angle Grinder GA7030/ S/ GA7040/ S 180mm (7") / GA9030/ S/ GA9040/ S 230mm (9")

204



Double Insulation



Soft Start
(GA7030S/ GA7040S/ GA9030S/ GA9040S)



Torque Limiter



(GA7030)



(GA9040S)

	GA7030/ GA7030S	GA7040/ GA7040S	GA9030/ GA9030S	GA9040/ GA9040S
Continuous rating Input	2,400W	2,600W	2,400W	2,600W
Capacity (Depressed center wheel)	180mm (7")		230mm (9")	
Hole dia.	22.23mm (7/8")		22.23mm (7/8")	
No load speed	8,500rpm		6,600rpm	
Dimensions (L x W x H)	511mm x 200mm x 140mm (20-1/8" x 7-7/8" x 5-1/2")		511mm x 249mm x 140mm (20-1/8" x 9-3/4" x 5-1/2")	
Net weight*	6.0kg (11.2lbs)	6.4kg (14.0lbs)	6.3kg (13.9lbs)	6.6kg (14.6lbs) GA9040 6.7kg (14.8lbs) GA9040S
Power supply cord	2.5m (8.2ft)		2.5m (8.2ft)	

Standard Equipment: Lock Nut wrench, Grip (Tool does not come with depressed center wheel)

*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.



Grinding Accessories

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BD-AJ