

Satisfy Professional's Needs

**Makita**<sup>®</sup>

**Circular Saw**  
**HS7601 190mm (7-1/2")**

**Compact and lightweight**



**1,200W**


Continuous rating input

Two-finger trigger switch

Soft grip provides more comfort

### Flat Motor Housing Design

increases stability when changing blades.

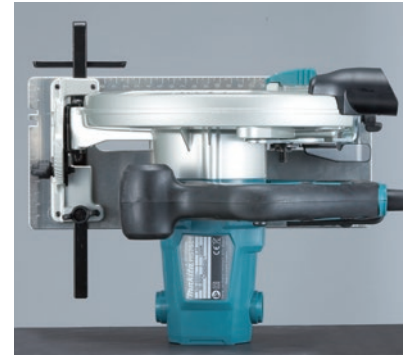

Aluminum plate base

Aluminum diecast safety cover

**1,200W**

Continuous rating input

### 1 Rear dust exhaust port

exhausts sawdust backward only, preventing it from scattering around to provide comfortable operation.



Dust nozzle can be attached for use with a vacuum cleaner.

### 2 Single action lever

for quick adjustment of cutting depth



### 3 Rear angular guide

For smooth and precise adjustment of bevel angle

#### Compatible with Guide rail

For use with Guide rail, the shape of base is designed to install Guide rail adapter.



Optional Guide rail adapter Part No. 197005-0

Rear angular guide

## Compact and lightweight

Much more compact and lightweight than the predecessor model

Model No.	Overall length (mm)	Net weight (kg)
HS7601	309	4.0
Predecessor Model	345	4.9

## Circular Saw

### HS7601 190mm (7-1/2")

303

- Double Insulation
- Dust Collecting

<b>Continuous rating Input</b>	1,200W
<b>Max cutting capacity</b>	at 0 degrees : 66mm (2-5/8") at 45 degrees : 46mm (1-13/16")
<b>Blade diameter</b>	190mm (7-1/2")
<b>No load speed (rpm)</b>	5,200
<b>Dimensions (LxWxH)</b>	309x232x255 (12-1/8"x9-1/8"x10")
<b>Net weight</b>	4.0kg (8.8lbs)
<b>Power supply cord</b>	2.5m (8.2ft)

#### Standard Equipment :

TCT saw blade, Hex wrench, Guide rule (Rip fence), Dust nozzle

weight according to EPTA-Procedure 01/2003  
Items of standard equipment and specifications may vary by country or area.



Cutting Accessories

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-BA