



Satisfy Professional's Needs

Slide Compound Miter Saw
LS1216 / LS1216L 305mm (12")

DEEP EXACT CUTTING

Capable of diagonal cutting up to 203mm (8") crown molding



DXT

Deep and Exact Cutting Technology

DXT

305mm (12")

LS1216 / LS1216L


achieved by our consistent pursuit of cutting larger size workpiece but with higher accuracy.

Independent laser switch
(LS1216L only)

Horizontal handle

- Allows for comfortable movement of user's hand, wrist and arm.
- With rubberized soft grip for more control


Laser marker
(LS1216L only)



Miter range of
60 degrees right and
52 degrees left


Quick vertical vise

Holder set (All countries except USA)

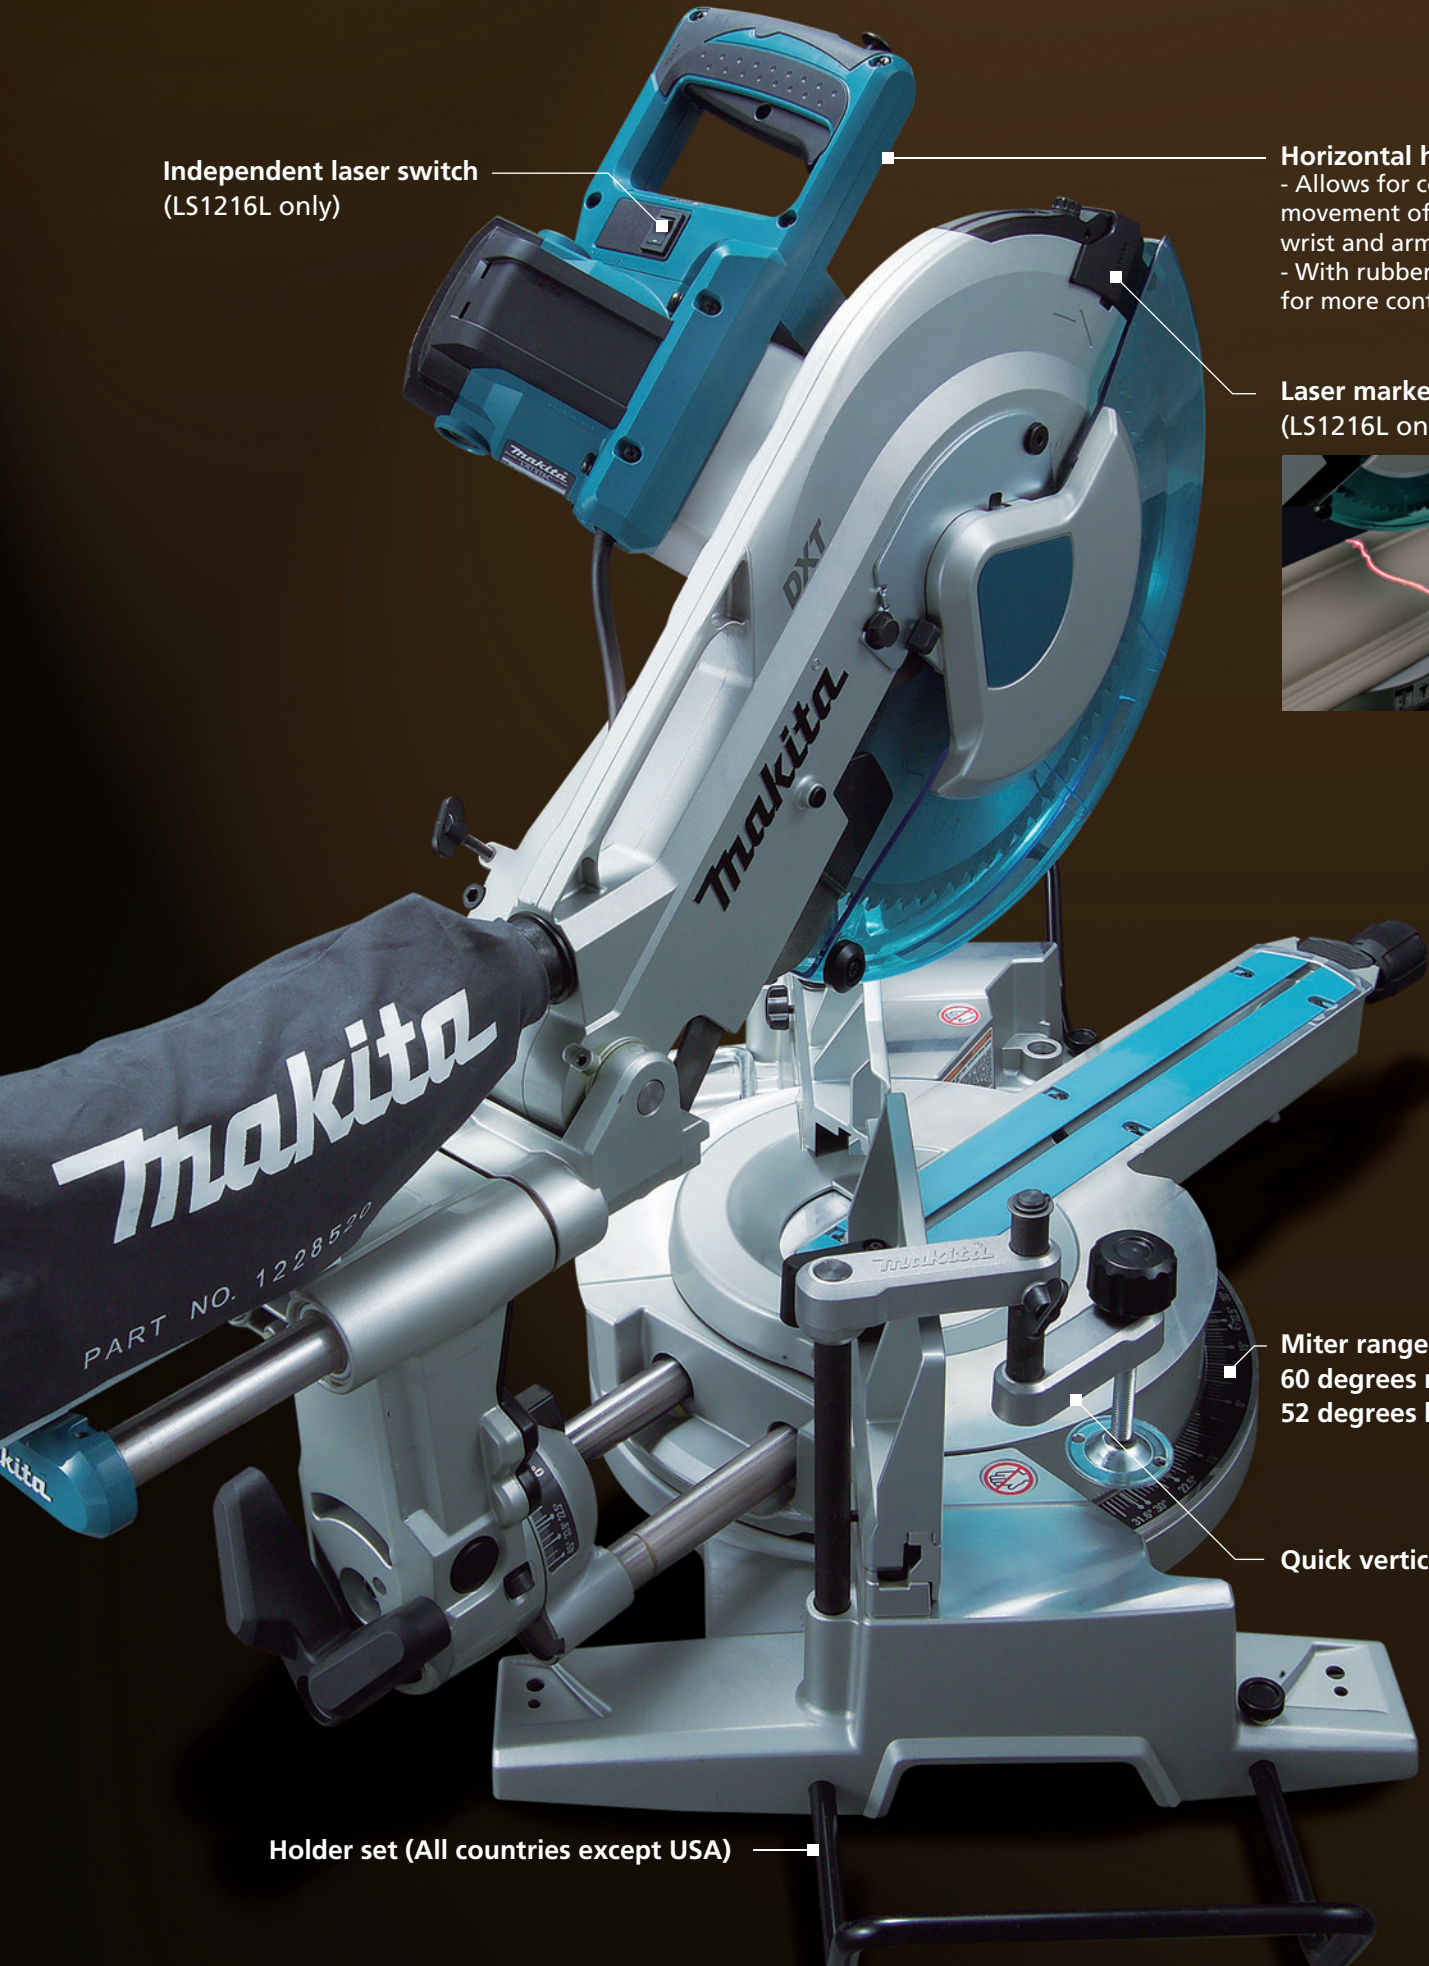

DEEP CUTTING


3-Stage reduction gear unit and Movable rear blade guard provide larger capacities of cutting Crown molding and Baseboard (Skirt board) .

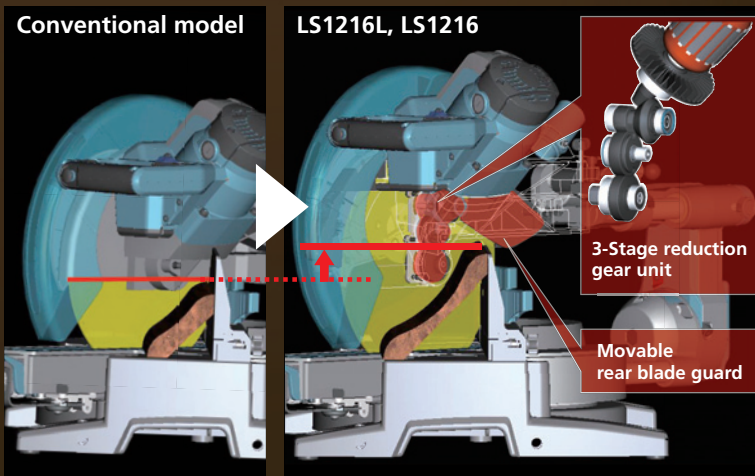

Capable of diagonal cutting up to **203mm (8") crown molding**



Capable of vertical cutting up to **165mm (6-1/2") baseboard (skirt board)**




EXACT CUTTING

Double sliding mechanism

Makita advantages obtained by using 4 short steel poles instead of 2 long poles are;


- Vibration-free, precise and exact cutting
- Compact tool design for jobsite portability

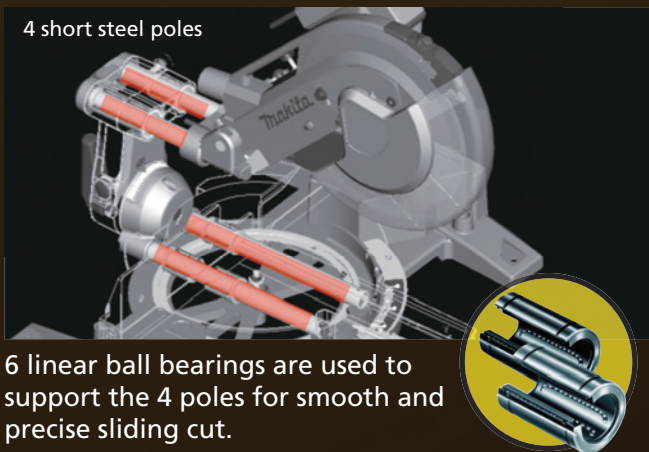

6 linear ball bearings are used to support the 4 poles for smooth and precise sliding cut.

Double sliding guide fence

The upper and the lower sections slide independently for added convenience; each upper fence slides outwards for bevel cut, and each lower fence slide inwards to securely hold small workpiece for precise and exact cutting.

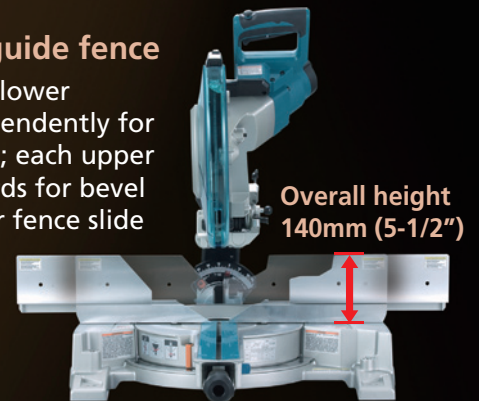

Overall height **140mm (5-1/2")**

Quick and accurate miter angle lock



-Miter angle can be locked/unlocked simply by turning the knob 90 degrees.

-With positive stops at 0, 15, 22.5, 31.6, 45 degrees

Cuts up to 416mm (16-3/8") workpiece in a single pass

With a 38mm (1-1/2") thick auxiliary wood facing on the turn base, able to cut 406mm (16") wide shelf board in a single pass and to miter cut 292mm (11-1/2") wide shelf board at 45 degrees.



Easy-to-read bevel angle scale with large graduations

Bevel range of 45 degrees right and left with positive stops at 22.5, 33.9, 45 degrees right and left



Max. cutting capacity (mm) (height x width) *European countries only

| Cross Cut | Miter Cut (left & right) | Bevel Cut (left & right) | Compound Cut | Crown molding, 45 degree type | Baseboard (Skirt board) |
|--|---|--|--|------------------------------------|--|
| | | | | | |
| 92 x 382 (3-5/8" x 15") 107 x 363 (4-1/4" x 14-1/4") *87 x 382 *102 x 363 | 45° left/right 92 x 268 (3-5/8" x 10-1/2") 107 x 255 (4-1/4" x 10") *87 x 268 *102 x 255 | 45° left 61 x 382 (2-3/8" x 15") 71 x 363 (2-13/16" x 14-1/4") *59 x 382, 69 x 363 45° right 44 x 382 (1-3/4" x 15") 54 x 363 (2-1/8" x 14-1/4") | Bevel 45° left 61 x 268 (2-3/8" x 10-1/2") Miter 45° left/right 71 x 255 (2-13/16" x 10") *59 x 268 *69 x 255 | Diagonal cut 203 (8") | Vertical cut 165 (6-1/2") |
| Using 38mm (1-1/2") auxiliary wood facing 120 x 292 (4-3/4" x 11-1/2") Using 60mm auxiliary wood facing *120 x 250 | 45° left/right Using 25mm (1") auxiliary wood facing 120 x 212 (4-3/4" x 8-3/8") Using 45mm auxiliary wood facing *120 x 172 | 45° left Using 38mm (1-1/2") auxiliary wood facing 80 x 292 (3-1/8" x 11-1/2") Using 35mm auxiliary wood facing *78 x 290 | Bevel 45° right 44 x 268 (1-3/4" x 10-1/2") Miter 45° left/right 54 x 255 (2-1/8" x 10") | Horizontal cut 320 (12-5/8") | Horizontal cut with 38mm (1-1/2") thick auxiliary wood facing on the turn base 416 (16-3/8") |
| with 38mm (1-1/2") thick auxiliary wood facing on the turn base 38 x 416 (1-1/2" x 16-3/8") | 45° left/right with 38mm (1-1/2") thick auxiliary wood facing on the turn base 38 x 292 (1-1/2" x 11-1/2") | 45° right Using 20mm (13/16") auxiliary wood facing 61 x 325 (2-3/8" x 12-3/4") Using 35mm auxiliary wood facing *61 x 290 | | | |

Accessories

Vertical vise assembly
Part No. 122854-6



Holder set (holder 2pcs. and thumb screw 2pcs. set)
Part No. 195240-4



Stand
Part No. 194043-3



Horizontal vise assembly
Part No. 122930-6



Dust bag assembly
Part No. 122852-0



Stand
Part No. 194943-7



Crown molding stopper set
Part No. 195253-5



Slide Compound Saw LS1216L / LS1216 305mm (12")

153

- Double Insulation
- Constant Speed
- Soft Start
- Brake
- Bevel Cutting 45 LR
- Dust Collecting
- Laser Marker (LS1216L only)



Photo: LS1216L

| | |
|---|---|
| Continuous rating Input Capacity | 1,650W at 0 degrees : 107 x 363mm (4-1/4" x 14-1/4") at 45 degrees : 107 x 255mm (4-1/4" x 10") |
| Blade diameter | 305mm (12") |
| No load speed (rpm) | 3,200 |
| Dimensions (L x W x H) | 806 x 640 x 721mm (31-3/4" x 25-1/4" x 28-3/8") |
| Net weight* | 26.4kg (58.2lbs) : LS1216L 26.3kg (58.0lbs) : LS1216 |
| Power supply cord | 2.5m (8.2ft) *weight according to EPTA-Procedure 01/2003 |

Standard Equipment Carbide-tipped saw blade, Socket wrench, Vertical vise assembly, Triangular rule, Dust bag, Holder set

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23476-2 AJ-BA